


Carcass: Cabinet panels are constructed from high-performance 18mm melamine faced high density particle board. All carcasses are edged in 1mm ABS edging to match carcass colour, with all fronts edged in 2mm high impact ABS for added protection. Each unit can be fitted internally with anti-bacterial liners for a range of trays or shelving.

Backs: Cabinet backs are constructed from high-performance 8mm melamine faced high density particle board, with added 18mm support rails across the width of the cabinet for added strength and stability.

Shelves: Manufactured from high-performance 15mm melamine faced high density particle board with all edges in 1mm ABS to match shelf colour.

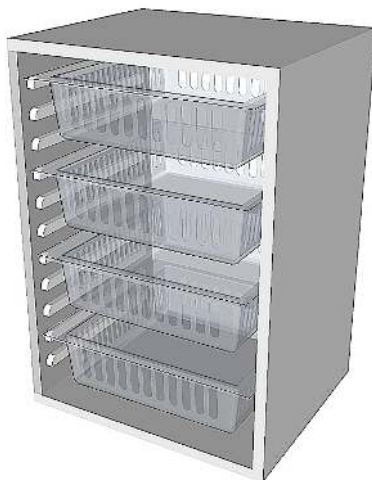

WC465

.....
WIDTH

455mm

.....
DEPTH

376mm

.....
HEIGHT

650mm

.....
DOOR OPTIONS:

MFC, Tambour & Polycarbonate

WC475

.....
WIDTH

455mm

.....
DEPTH

376mm

.....
HEIGHT

750mm

.....
DOOR OPTIONS:

MFC, Tambour & Polycarbonate

HARDWARE

HANDLES: Matt Nickel 256mm D type handles secured with M4 machine screws through the door panel.

HINGES: Heavy duty Aximat 100 hinges which are LGA tested in compliance with DIN EN 15570 test level 3 (80,000 Cycles). Large opening angle from 180 to 250 degrees provided by external pivot point with integrated automatic closing spring.

LOCKS: are fitted as standard on all door types.

WALL HANGERS: Concealed behind rear panel, with only a cover cap visible inside the cabinet. Loading capacity is 260kg per pair, evenly distributed load in accordance with regulation DIN68840.

**CONTACT US NOW FOR A FREE
NO OBLIGATION QUOTE**

Tel: 0161 998 9726

email: sales@klicktechnology.co.uk

www.klicktechnology.co.uk

KLICK

making room for
your ideas